

MRS Floor Stand Network Rack



Product Summary

MRS Floor Mount Racks designed for small Networking, Domestic application, Audio Video, Telecom and Lab applications. Racks are fabricated out of CRCA steel CNC programmed, punched, bended, welded and Powder coated with highest quality standards.

Configuration will be for standard racks are welded frame integrated with side panels and vented top cover with fan

Features


- Conforms to DIN 41494 OR equivalent ISO Standard
- Adjustable 19" equipment mounting verticals provides the better mounting flexibility, and maximizes the usable mounting space.
- Depth adjustable mounting slots.
- Precision engineering capabilities and best efficient software configuration product technology provide the best product quality and fastest delivery in the industry.
- Top and bottom Panel with ventilation and cable entry facility.
- Provision to mount the cooling fans on the top panel.
- Powder coated finish with Seven Tank pretreatment process meeting all industry standards.
- Grounding and Bonding Options. 100% assured compatibility with all equipments conforming to DIN 41494 (General industrial standard for equipments)

mounting provision, Front Glass door with lock and key provides you the visibility and security for your equipments. Back Metal door with lock and key. Free standing on floor with 4 No. castors wheels 2 wheels with break.

Racks are available from 9U to 27U Variants with 600mm deep configuration.

We can also undertake customized requirements.

MRS Floor Stand Network Rack

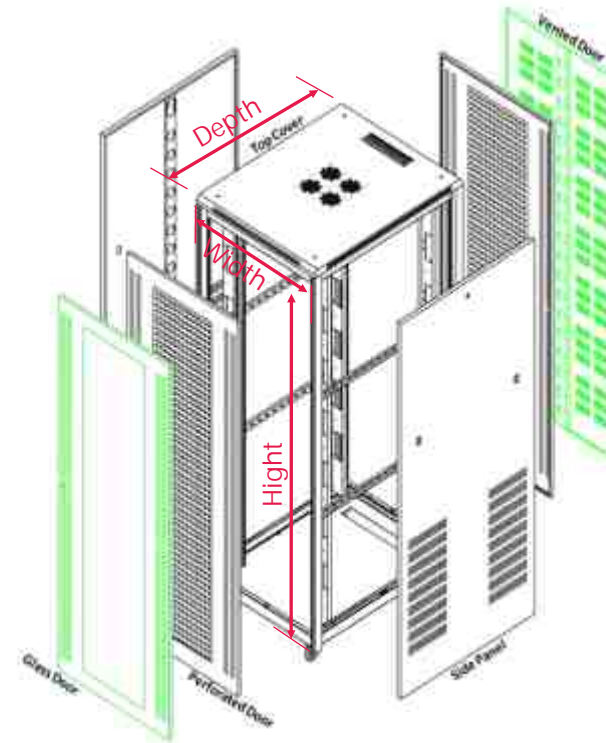

Optional Accessories

- Front doors of toughened glass/Perforated
- Rear steel doors venting options/Perforated
- Stationary and Sliding Shelves
- Cantilever Shelves
- Equipment Support Angles
- Cooling Fans
- Cable Management Accessories
- AC Mains Channel
- Earth Continuity Kit
- Castors with foot-operated brakes
- Captive Mounting Hardware
- Fire Alarm Unit
- Fan Tray with Electronic Controller
- Digital Locks
- Temperature Indicator

Technical Data

Rack Standard	Conforms to DIN 41494 or equivalent standard
Construction	Welded
Front Door	Lockable Toughened Glass Door or Perforated
Basic Frame	Steel
Equipment Mounting	DIN Standard
Mounting Angle	19" Mounting angle made of formed steel
Standard Finish	Powder Coated
Top and Bottom Cover	Welded to Frame, Vented and Cable entry/exit cut outs from Top & Bottom
Side Panels	Integrated Side panels.
Castor wheels	Front 2 wheels with break / Rear wheel without break
Standard Color	Grey & Off White or Black
Static Load	200 kgs

Part Code & Dimensions

Part Code	Total Height In mm(H)	Usable Height (h)	Total Width In mm (W)	Usable Width (w)	Total Depth In mm (D)	Usable Depth In mm (d)
MRS-FS-6060-09	578	09U	600	19"	600	520
MRS-FS-6060-12	715	12U	600	19"	600	520
MRS-FS-6060-15	845	15U	600	19"	600	520
MRS-FS-6060-17	934	17U	600	19"	600	520
MRS-FS-6060-22	1156	22U	600	19"	600	520
MRS-FS-6060-27	1378	27U	600	19"	600	520

1U-44.45 mm

Note: Customized model also undertaken on request. Different color options with powder coating